
EST 2025

VillaePaint

OWEN

Explore the natural world--Discovery

Explore the natural world. Discovery

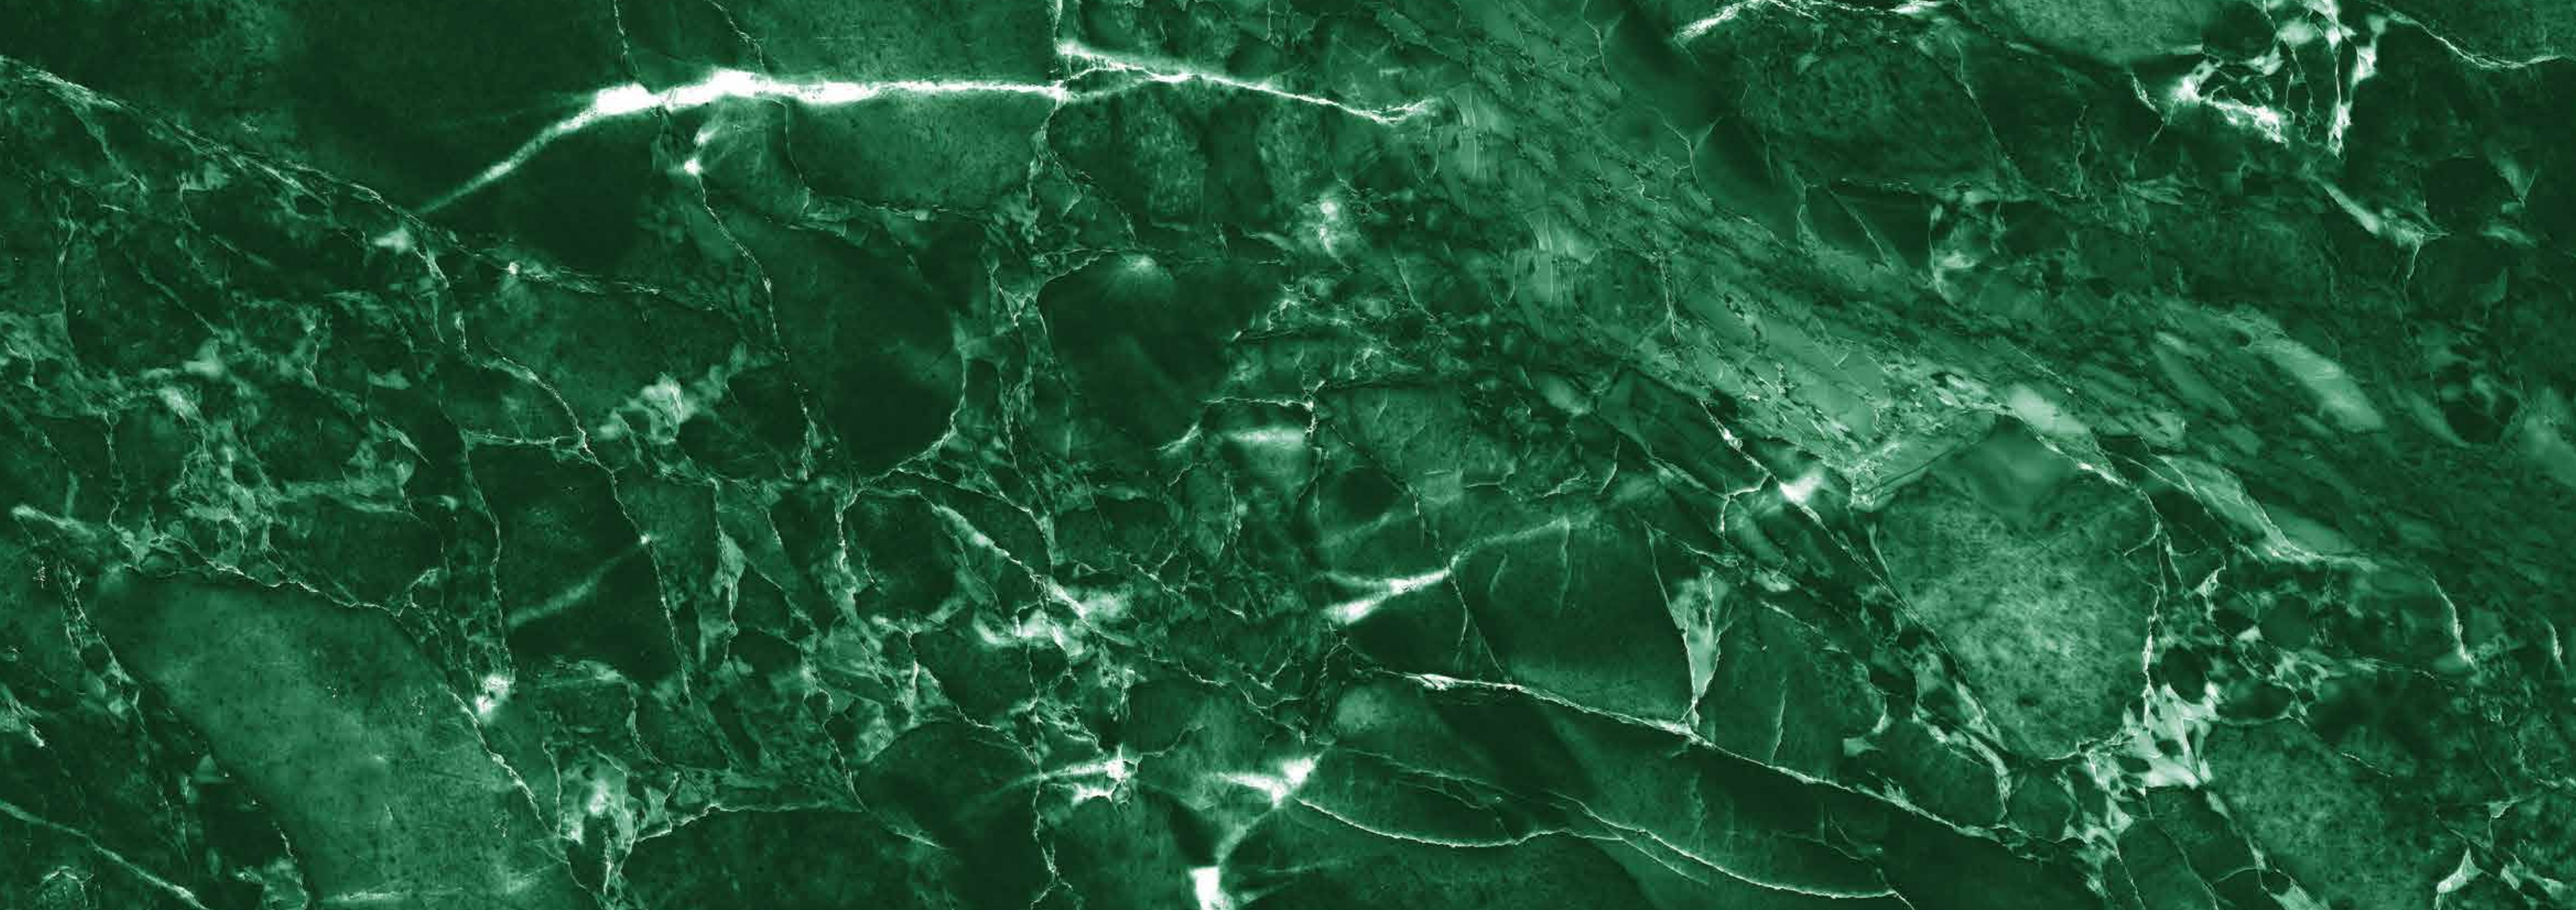



YS 496 A



YS 496 D



YS 496 D



YS 448 A





YS 448 D



YS 451 A



YS 451 B



YS 451 C



YS 451 D



YS BIANCO






YS 448 A



YS 448 B



YS 448 C



YS 448 D



YS 449 A



YS 449 B



YS 449 C



YS 449 D



YS 478 A



YS 478 B



YS 478 C



YS 478 D







YS 496 A



YS 496 B



YS 496 C



YS 496 D



YS 495 A



YS 495 B



YS 495 C



YS 495 D



YS 470 A



YS 470 B



YS 470 C




YS 470 D



YS 467 A



YS 467 B



YS 467 C



YS 467 D





YS 498 A



YS 498 B



YS 498 C



YS 498 D





YS 497 B



YS 475 A



YS 475 B



YS 475 C



YS 475 D



YS 456 A




YS 456 B



YS 456 C



YS 456 D



YS 497 A



YS 497 B



YS 497 C



YS 497 D



YS 469 A

YS 469 B

YS 469 C

YS 469 D

YS 435 A

YS 435 B

YS 435 C

YS 435 D

YS 431 A

YS 431 B

YS 431 C

YS 431 D

YS 455 A

YS 455 B

YS 455 C

YS 455 D



YS 499 A

YS 499 B

YS 499 C

YS 499 D





YS 433 A

YS 433 B

YS 433 C

YS 433 D

YS 437 A

YS 437 B

YS 437 C


YS 437 D

YS 471 A

YS 471 B

YS 471 C

YS 471 D

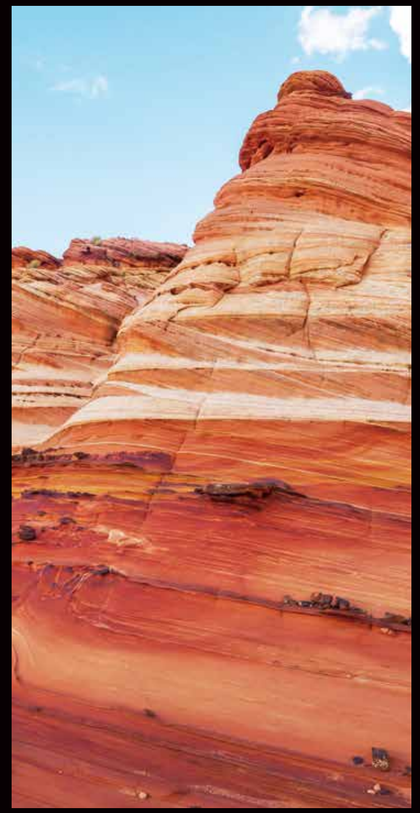

YS 441 A

YS 441 B

YS 441 C

YS 441 D

YS 452 A

YS 452 B

YS 452 C

YS 452 D

YS 458 A

YS 458 B

YS 458 C

YS 458 D

YS 530 A

YS 530 B

YS 530 C

YS 530 D



YS 531 A

YS 531 B

YS 531 C

YS 531 D





YS 426 A

YS 426 B

YS 426 C

YS 426 D

YS 439 A

YS 439 B

YS 439 C

YS 439 D

YS 440 A

YS 440 B

YS 440 C

YS 440 D





YS 466 A



YS 466 B



YS 466 C



YS 466 D



YS 533 A



YS 533 B



YS 533 C



YS 533 D



YS 532 A



YS 532 B



YS 532 C



YS 532 D



YS 463 A



YS 463 B



YS 463 C



YS 463 D



YS 476 A

YS 476 B

YS 476 C

YS 476 D





YS 535 A

YS 535 B

YS 535 C

YS 535 D

YS 453 A

YS 453 B

YS 453 C

YS 453 D

YS 534 A

YS 534 B

YS 534 C

YS 534 D



YS 536 A

YS 536 B

YS 536 C

YS 536 D

YS 428 A

YS 428 B

YS 428 C

YS 428 D

YS 446 A

YS 446 B

YS 446 C

YS 446 D

YS 447 A

YS 447 B

YS 447 C

YS 447 D





YS 429 A



YS 429 B



YS 429 C



YS 429 D







YS 538 A



YS 538 B




YS 538 C



YS 538 D



YS 537 A



YS 537 B



YS 537 C



YS 537 D



YS 461 A



YS 461 B



YS 461 C



YS 461 D



Base material: This water-based coating material delivers exceptional structural strength, superior color stability, high vapor permeability and outstanding decorative properties. It is particularly suitable for reinforcement and decorative finishing of surfaces with important artistic and historical significance.

Tools: ① Imported Charm Spray Gun(GS-GMR-K800) ② Premium Wool Roller (4"SB-2A)（Medium Nap）③ PAVAN Stainless Steel Trowel（844/1）④ PAVAN Putty Knife(504IS-80MM)（Rounded Edge）⑤ Sandpaper (400 Grit)

Auxiliaries: Solid Wax（Cera301）

Construction Steps

1、Substrate Preparation: Ensure wall substrates are dry, clean, free of grease and loose dust. Repair cracks and uneven areas in advance. New wall masonry must be fully dried and cured before application.

2、Penetrating Primer Application: Apply the matching penetrating primer (PM-NB104) to the putty substrate using either the Premium Wool Roller (4" SB-2A) for rolling or the Imported Charm Spray Gun (GS-GMR-K800) for spraying to penetrate and consolidate the base layer.

3、Base Primer Application: Use the dedicated matching primer (PM-701), which can be diluted with 15–20% water. Apply evenly to walls with the Premium Wool Roller (4" SB-2A) or Imported Charm Spray Gun (GS-GMR-K800). Theoretical Coverage: 8–10 m^2/kg/coat. Recoating interval: 3–4 hours at 25°C with relative humidity ⩽85%. Proceed to the next step only after full curing of the primer layer.

Classic Finish: Apply OWEN Jade Material with the PAVAN Stainless Steel Trowel (844/1) to form a coating approximately 1 mm thick for a smooth and compact surface. Let the wall dry for 1 hour at 25°C, then thoroughly sand the surface with 400-grit sandpaper and remove all dust. Apply evenly over the entire surface with irregular strokes of 6–10 cm long and 4–6 cm spacing between strokes. Allow another 1 hour of drying at 25°C, then repeat the above application process over the first coat three more times. Ensure each new stroke overlaps the previous coat to achieve a semi-transparent antique finish. When applying the product with the PAVAN Stainless Steel Trowel (844/1), create irregular strokes 8–12 cm in length with 2–3 cm spacing. Stainless steel trowels of any size are acceptable depending on the desired aesthetic. Once fully cured, apply Solid Wax (Cera301) with the PAVAN Stainless Steel Trowel (844/1) and polish the surface using the same trowel.

Precautions

① At 25°C, allow a drying period of 3–4 hours. Full hardening occurs after 24 hours; the curing speed varies with ambient temperature.

② Construction environment: 25°C with relative humidity ⩽ 85%. Unopened products carry a 2-year shelf life. A 15–20% color deviation exists between the shades shown in the color catalog and the actual material. Color confirmation via sample swatches prior to construction is recommended. The applicable ambient temperature range for this product is 10°C to 30°C.

③ Avoid direct skin contact. Wear eye and facial protective equipment during operation. In case of accidental contact, rinse the affected area thoroughly with running water immediately and seek medical treatment. Do not clean construction equipment in rivers or sewer drains.

Application Guidelines

All information contained herein is accurate and reliable. Nevertheless, as actual on-site application conditions are beyond our control, The manufacturer shall not be liable any recommendations provided. It is advised to carry out a full coating cycle test on a small test area to inspect adhesion, mechanical strength and final finish before formal construction. Conduct regular inspections during surface finishing. OWEN Jade Material is formulated with natural raw materials and special resins, whose performance varies significantly based on application techniques, resulting in unique finish characteristics for each coating cycle. A color deviation of 15%–20% may exist between the actual product and catalog swatches, and minor color variations can also be found across different production batches. If two batches are used simultaneously, apply a small amount in an inconspicuous corner first, then blend leftover material with the new batch in a large container prior to continuing construction.

Warning:OWEN Jade Material requires skilled application techniques. To avoid inconsistent color and finish, all construction work shall be completed by the same operator.



基料：这是一款水基材料产品，具有极佳的强度、色彩稳定性及高透气性、装饰性，尤其适合强化装饰具有重要艺术及历史价值的表面。

工具：①进口魅力喷枪(GS-GMR-K800) ②高级羊毛滚筒(4"SB-2A)（中毛）③PAVAN不锈钢抹刀（844/1）④PAVAN油灰刀(504IS-80MM)（圆角）⑤砂纸（400目）

辅料：固态蜡（Cera301）

施工步骤

1、基层处理：确保墙面干燥、清洁、无油污、无浮灰，如有裂缝或凹凸不平的地方需提前修补平整。对新建墙体需待其充分干燥保养后进行施工。

2、渗透底漆处理：使用配套的渗透底漆（PM-NB104），通过高级羊毛滚筒(4"SB-2A)滚涂或进口魅力喷枪(GS-GMR-K800)喷涂的工艺，对腻子基层进行渗透和固化处理。

3、底漆处理：使用专业配套的底漆（PM-701），底漆（PM-701）可加15-20%的水稀释，通过高级羊毛滚筒(4"SB-2A)滚涂或进口魅力喷枪(GS-GMR-K800)喷涂，均匀涂刷于墙面，可施工8-10㎡/KG一遍，重涂3-4小时，温度25°，相对湿度≤85%，等待底干透方可进行下步施工。

经典效果：使用PAVAN不锈钢抹刀(844/1)涂抹覆盖玉石(OWEN)，在表面上形成约1mm厚的涂层，营造光滑紧致的表面。在25°C的环境中，墙面待干1小时后，用砂纸（400目）对表面进行彻底打磨、除尘，对要覆盖的整个表面以不规则的手法（6-10cm，间隔为4-6cm）涂抹覆盖。在25°C的环境中，墙面待干1小时后，再次从第一层涂层的表面开始，涂抹覆盖手法如上所述，每一个手法都与先前涂抹覆盖的涂层重叠，再重复3次，最终达到半透明的仿古效果。使用PAVAN不锈钢抹刀(844/1)涂抹覆盖该产品时，采用不规则的手法（8-12cm长，间隔为2-3cm）。也可使用任何尺寸的不锈钢抹刀，具体取决于所需的效果。待干透后，用PAVAN不锈钢抹刀（844/1）上固态蜡（Cera301），并用PAVAN不锈钢抹刀（844/1）抛光。

注意事项

①在 25°C 的环境中，静置约 3 - 4 个小时干燥，静置 24 小时后会硬化，取决于具体气温。

②25°C相对湿度≤85%，未开盖产品保质期 2 年，产品的样品册中的色泽和实际中的色泽都会有 15-20%的色差，建议先确定小样色板，此产品建议适用 10°C-30°C之间。

③避免直接接触皮肤，保护好眼睛和脸部，如不慎接触，应立即用水彻底冲洗并就医，不得在河道、下水道中清洁设备。

使用忠告

本文提供的信息精准无误。然而，考虑到该产品的实际使用条件不受我们的控制，因此我们对所给出的任何建议或忠告均不负责。我们建议在小面积内进行完整的涂覆周期测试，以检查相应的结果，尤其是产品的粘着情况、强度和最终效果。随后，装饰表面并不断查验装饰效果，因为玉石 (OWEN) 以天然成分和特殊树脂制成，它们会发生不同的反应，具体根据使用方法而定。因此，每个涂覆周期都具有其独有的特性。产品色调可能会与目录中的色调相差 15% - 20%，各批次之间也会存在色调差异的情况。若使用的产品属于两个不同的批次，则请在角落完成工作后，将剩余的产品与较大容器中的新批次产品混合，然后继续。

警告：玉石 (OWEN) 系列产品对施工人员的手法要求较高。因此，我们建议所有作业都由同一个人完成，以避免在效果和颜色上存在差异。

TXT

I Descrizione del processo

R Технологическое описание

ES Instrucciones del proceso

A وصف الإجراءات

KO 공정 설명

日 工程仕様書

IN प्रक्रिया विवरण

TH ขั้นตอนการปฏิบัติงาน

GROWTH CULTURE 格式文化 广东格式装饰文化发展股份有限公司
GROWTH DECORATION CO.,LTD
广东省佛山市顺德区容桂容里昌宝西路50号
http://www.growthgroup.net.cn Tel: 400-8948-787

VillaePaint
甄图艺墅家